

SPEAKER MOUNTING BRACKET HY-0871WS

Please follow the instructions in this manual to obtain the optimum results from this unit.
We also recommend that you keep this manual handy for future reference.

■ SAFETY PRECAUTIONS

- Be sure to read the instructions in this section carefully before use.
- Make sure to observe the instructions in this manual as the conventions of safety symbols and messages regarded as very important precautions are included.
- We also recommend you keep this instruction manual handy for future reference.

Safety Symbol and Message Conventions

Safety symbols and messages described below are used in this manual to prevent bodily injury and property damage which could result from mishandling. Before operating your product, read this manual first so you are thoroughly aware of the potential safety hazards as well as understand the safety symbols and messages.



WARNING Indicates a potentially hazardous situation which, if mishandled, could result in death or serious personal injury.

- Install the unit only in a location that can structurally support the weight of the unit and the mounting bracket. Doing otherwise may result in the speaker falling down and causing personal injury and/or property damage.
- Owing to the speaker's size and weight, be sure that at least two persons are available to install the speaker. Failure to do so could result in personal injury.
- Do not hang down from the bracket, as the bracket could fall, resulting in personal injury.
- Use nuts and bolts (not supplied with the unit) that are appropriate for the wall's structure and composition. If the wall cannot withstand the weight of both the speaker and bracket, the speaker may fall, resulting in material damage and possible personal injury.

■ GENERAL DESCRIPTION


The HY-0871WS Speaker Mounting Bracket is specially designed for mounting TOA's ES-0871 Speaker System to walls.

■ COMPONENTS


Arm A	2
Arm B	2
Bracket	3
Base	1
Hexagon bolt W3/8" x 45	10
Spring washer (W3/8")	10
Plain washer (W3/8")	10
Square nut (W3/8")	6
Hexagon bolt M8 (with spring washer and plain washer)	2

■ INSTALLATION

• Wall Mounting Dimension

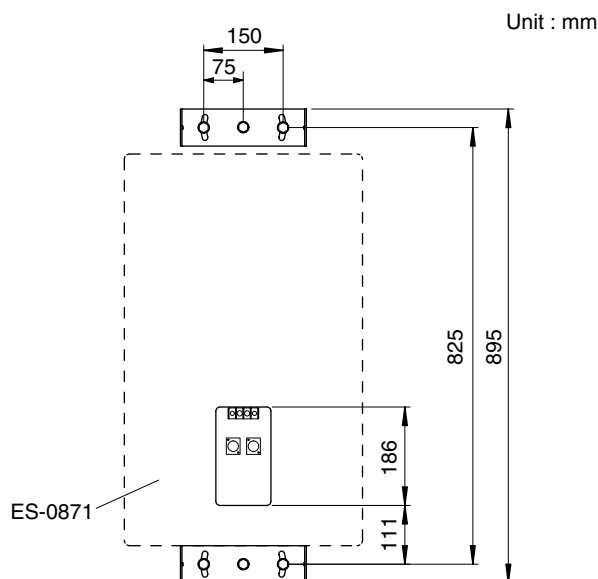

• Installation

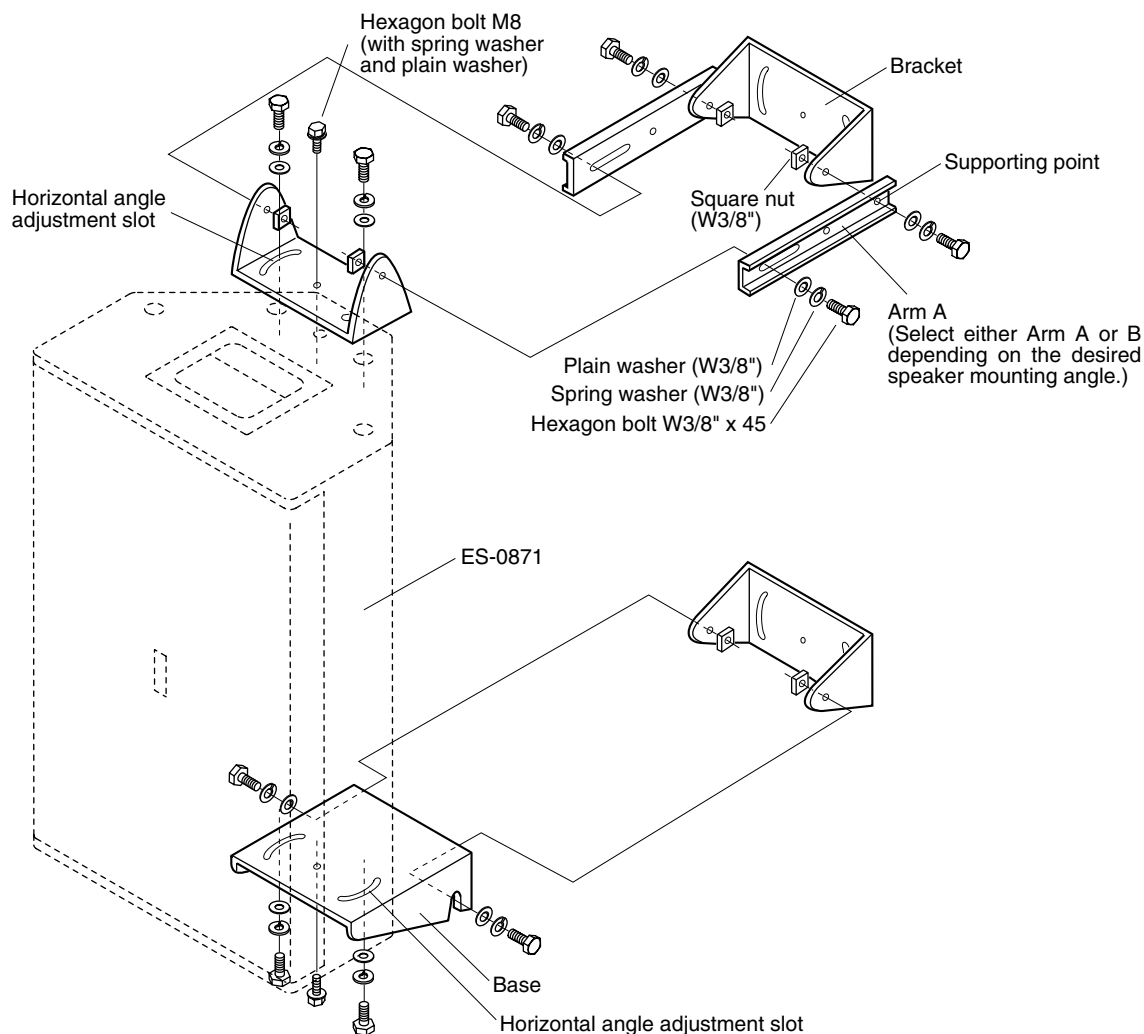


• Adjustable Mounting Angle Range

[Vertical (downward-facing) angle]

Use Arm A or B to set vertical mounting angle. The following table shows the adjustable mounting angle range of each adjustment slot of (a) to (e). Select either Arm A or B depending on the desired speaker mounting angle.

Adjustment slot	Adjustable vertical (downward-facing) angle range
(a)	0°
(b)	3.7° – 7.3°
(c)	0°
(d)	11° – 14.6°
(e)	18.3° – 22°

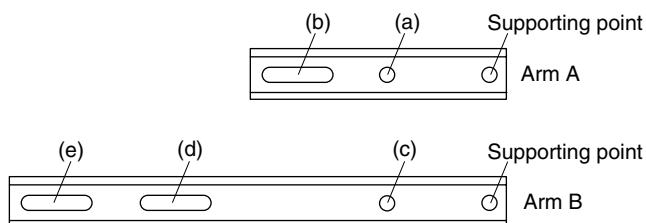

[Horizontal (leftward/rightward) angle]

To change the horizontal angle, use the horizontal angle adjustment slot in the base and bracket. (Refer to the section "Installation".) Leftward and rightward angles are both adjustable in the range of 15°.

■ SPECIFICATIONS

Finish	Rolled steel plate, paint, black, semi-mat
Weight	4 kg

Note : The design and specifications are subject to change without notice for improvement.



TOA Corporation

Printed in Japan
133-05-319-30